

MODEL NUMBER	IEEE10-18-215T		
HORSEPOWER	10		
RPM / POLES	1800 / 4 (1500 / 4)		
VOLTAGE / PHASE	460 / 3 (380 / 3)		
FRAME	215T		
ENCLOSURE / DEGREE OF PROTECTION	TEFC / IP56		
FREQUENCY	60 HZ (50 HZ)		
FULL LOAD SPEED	1760 RPM (1461 RPM)		
SERVICE FACTOR	1.15 (1.0)		
INSULATION CLASS	F Class N Varnish		
FULL LOAD AMPS; 460 (380)	12.8 A (15.5 A)		
LOCKED ROTOR CURRENT (% Full Load)	750 %		
NEMA CODE LETTER	J		
EFFICIENCY / POWER FACTOR	<u>LOAD</u>	<u>EFF.</u>	<u>P.F.</u>
	100 %	91.7 %	80.5 %
	75 %	91.7 %	76.0 %
50 %	89.7 %	66.0 %	
DUTY CYCLE	S1 / Continuous		
TORQUE	<u>FULL LOAD</u>	<u>LRT</u>	<u>BDT</u>
	30.0 lb.ft	180 %	240 %
NEMA DESIGN	B		
MOMENT OF INERTIA	<u>LOAD (Max.)</u>	<u>MOTOR</u>	
	177.979 lb.ft ²	0.712 lb.ft ²	
SOUND PRESSURE LEVEL (No Load 1 M From Motor)	70 dB(A)		
MAX. SHAFT VIBRATION	0.08 In/Sec – Peak Velocity		
NUMBER OF STARTS (Hot / Cold)	2 Hot / 3 Cold		
MAX. AMBIENT TEMPERATURE	40° C		
MAX. ELEVATION	3300 Ft. Above Sea Level		
TEMPERATURE RISE (At Full Load)	80° C		
DRIVE-END BEARING	6307ZC3		
OPPOSITE DRIVE-END BEARING	6307ZC3		
BEARING SEAL TYPE	ProTech™ IP66 Labyrinth On DE and ODE		
GREASE TYPE	Mobil Polyrex EM		
MOUNTING	F1 (F2 Suitable), W6, W8, B3, V5, V6		
ROTATION	Bi-Directional		
APPROXIMATE WEIGHT	165 lbs		
AREA CLASSIFICATION	Class I, Division 2, Groups A, B, C, D, T3A		
PAINT	Epoxy		
INVERTER RATING	10:1 CT / 1000:1 VT		
INSULATION TYPE	Hyundai Inverter Shield, Meets NEMA MG1 Part 31		
SPECIFICATION - In Accordance With	IEEE-841, Version 2009, NEMA, CSA		



CC 038A





I E E E 8 4 1 TEFC

THREE PHASE INDUCTION MOTOR

TYPE

PKP

CAST IRON FRAME


FRAME SIZE

OUTPUT(HP)

POLES

Hz

TIME RATING

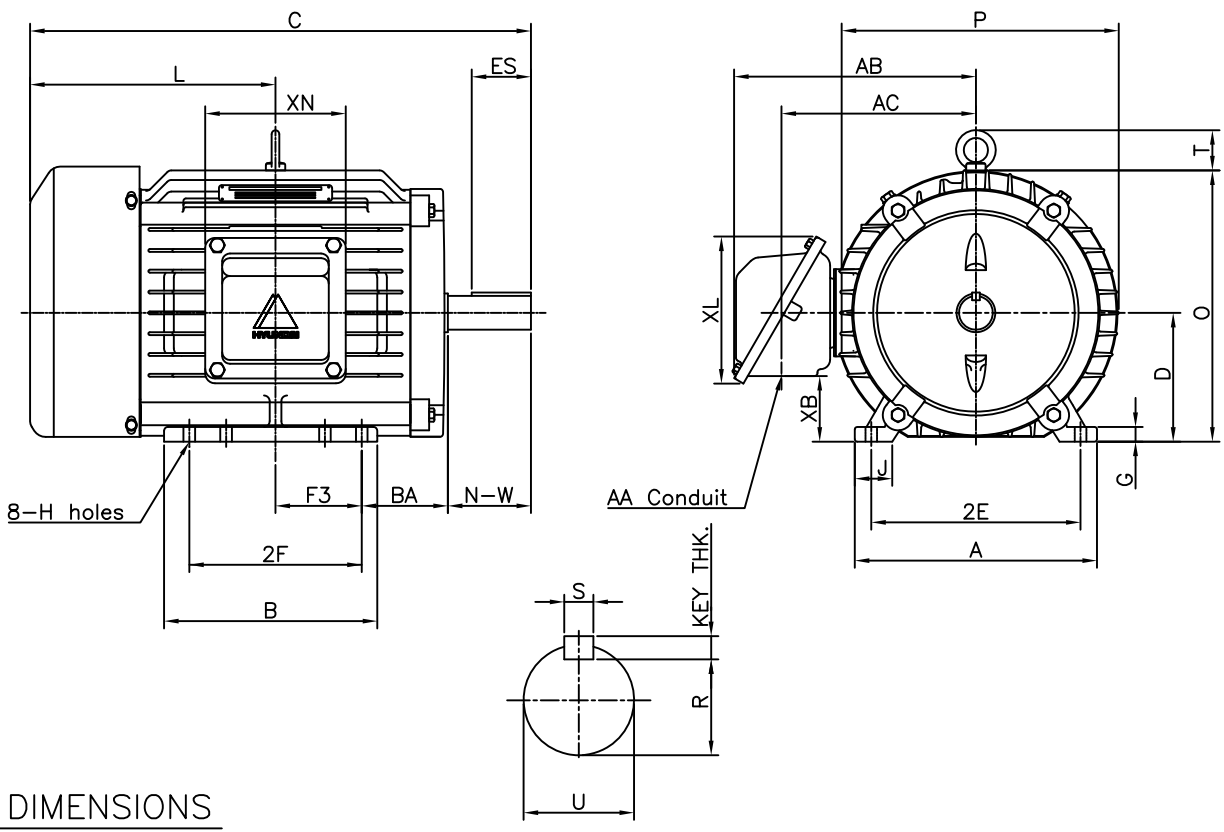

DIMENSIONS


M O U N T I N G									C O N D U I T B O X						APPROX. WGT.(LB)
A	B	2E	2F	-	F3	G	J	H	AA	AB	AC	XB	XL	XN	
9.84	8.66	8.50	7.00	-	3.50	0.60	1.52	0.41	1.00	9.82	7.90	2.67	5.97	5.71	165

O V E R A L L							S H A F T					KEY THK.	B E A R I N G	
BA	C	D	L	O	P	T	U	N-W	KEYWAY				DRIVE END	OPP. DRIVE END
									R	ES	S			
3.50	20.36	5.25	9.97	11.02	11.26	1.63	1.375	3.38	1.201	2.41	0.312	0.312	6307ZC3	6307ZC3

NOTE

- 1.Dimension "D" tolerance : +0.00inch - 0.03inch
- 2.Dimension "U" tolerance : +0.000inch - 0.0005inch
- 3.Dimension "R" tolerance : +0.000inch - 0.015inch

APPD BY	J.H.KIM	UNIT	INCH	SUBJECT	NEMA 215T	CAD PROJ	\ FILE	
CHKD BY	N.D.LEE	SCALE	1/8			SCALE-NEMA\A1106AA		
CHKD BY	K.S.LEE	PROJEC'N	3rd Angle	TITLE				OUTLINE
DSND BY	S.W.SEO	DATE	2010.12.20					



REF. NO	350A8106AA	Sheet No.	of
DWG NO	350A8106AA	Revision No.	0



PERFORMANCE CURVE


CURVE NO.

P-PKP215SR2


Type	:	PKP
Full Load Torque	:	30.0 lb.ft
Motor moment of Inertia (J)	:	0.712 lb.ft ²
Load moment of Inertia (J)	:	177.979 lb.ft ²

	7.5 kW	10 HP	60 Hz
	4 P	Rated Speed : 1760 RPM	
Rated Voltage	575V	460V	230V
Full Load Current	10.2A	12.8A	25.6A

SPEED VS TORQUE & CURRENT CURVE

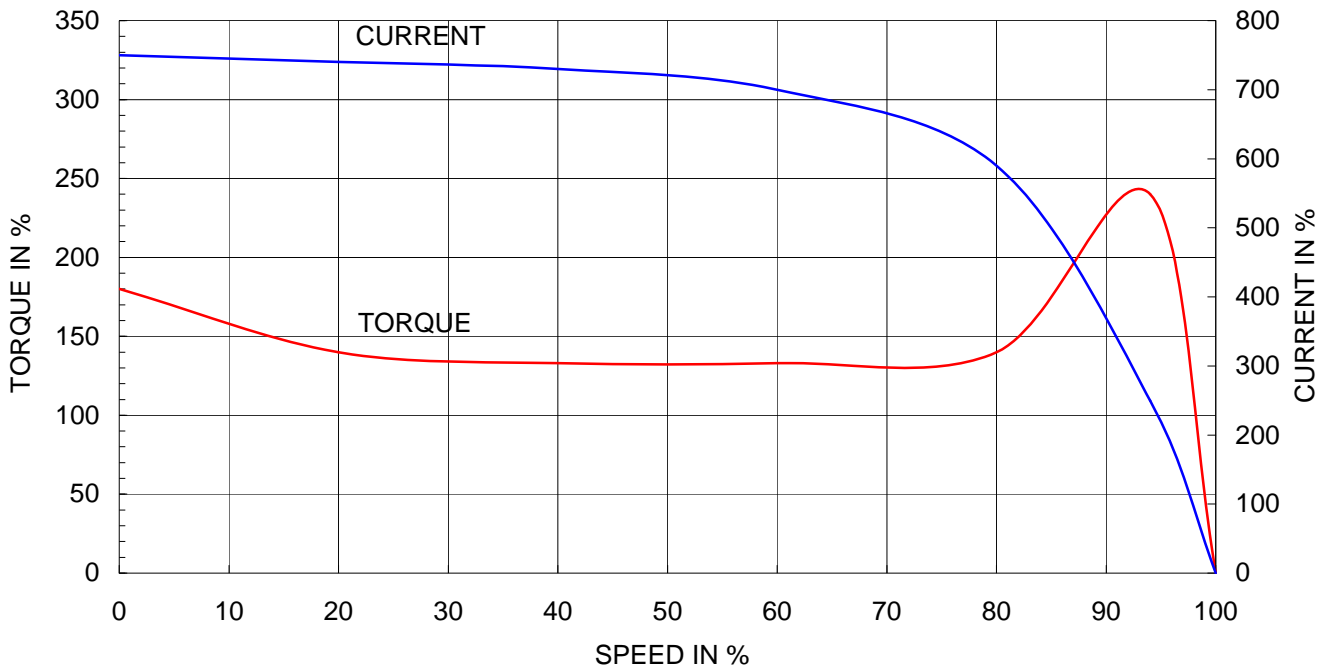

OUTPUT VS EFF., P.F & CURRENT CURVE

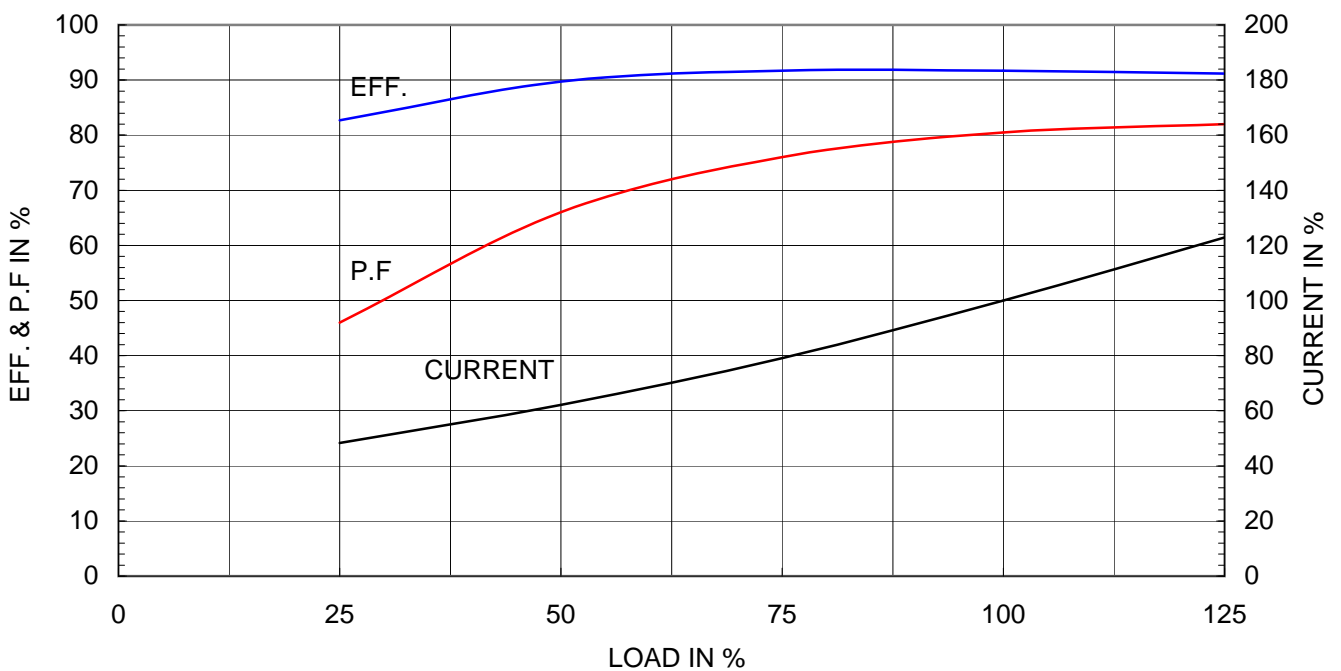




THERMAL LIMIT & TIME CURRENT CURVE

CURVE NO.

T-PKP10-18-215T

Type :	PKP10-18-215T	
FULL LOAD TORQUE :	30.0	lb.ft
J OF LOAD :	-	lb.ft²
J OF MOTOR :	0.7	lb.ft²



10 HP	4 P	60 Hz
RATED SPEED :		1760 rpm
VOLTAGE	460 V	575 V
RATED CURRENT	12.8A	10.2A

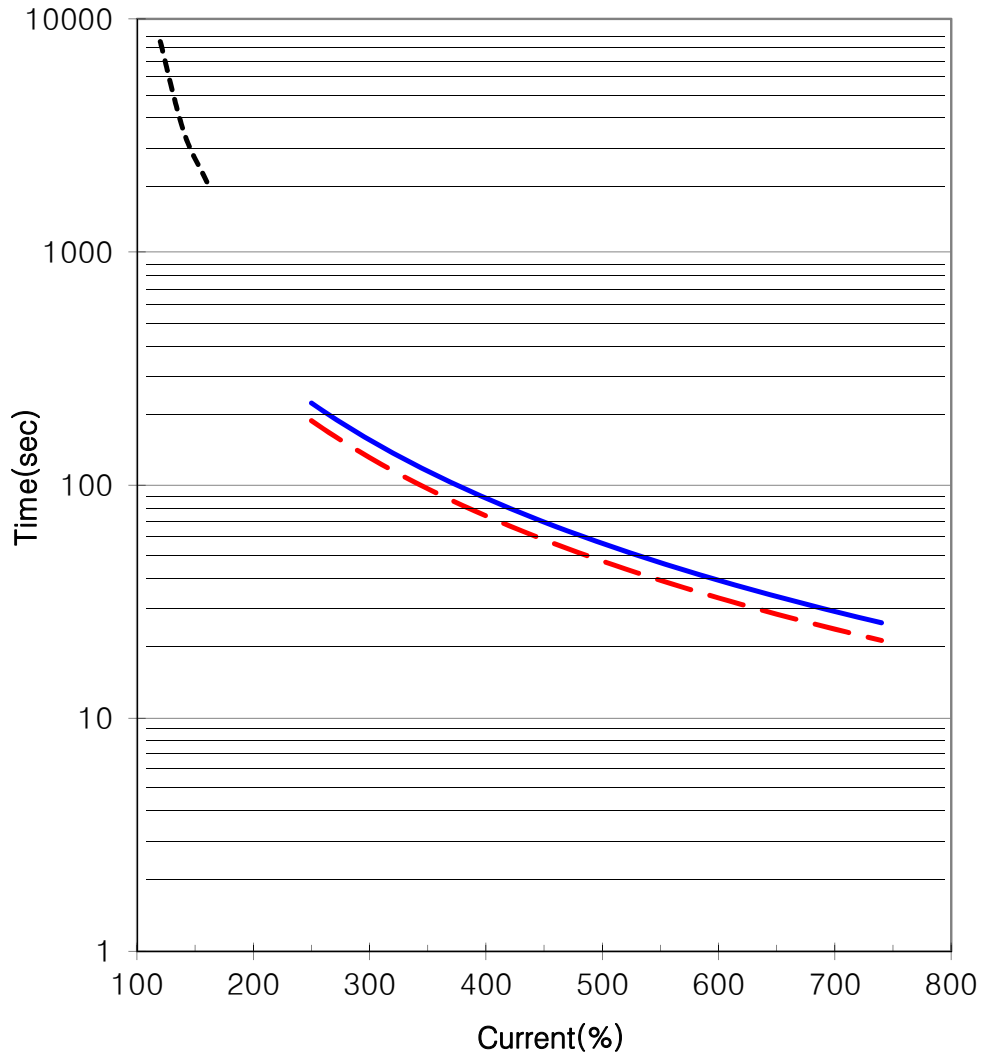

— THERMAL LIMIT CURVE AT COLD CONDITION
- - THERMAL LIMIT CURVE AT HOT CONDITION


STARTING TIME	SAFE STALL TIME
- at rated voltage starting	21 sec. at Hot condition
- at 80% of rated voltage starting	25 sec. at Cold condition

THIS DRAWING IS PROPRIETARY TO HHI. NO PART OF THIS DRAWING MAYBE REPRODUCED WITHOUT THE PERMISSION OF HHI.

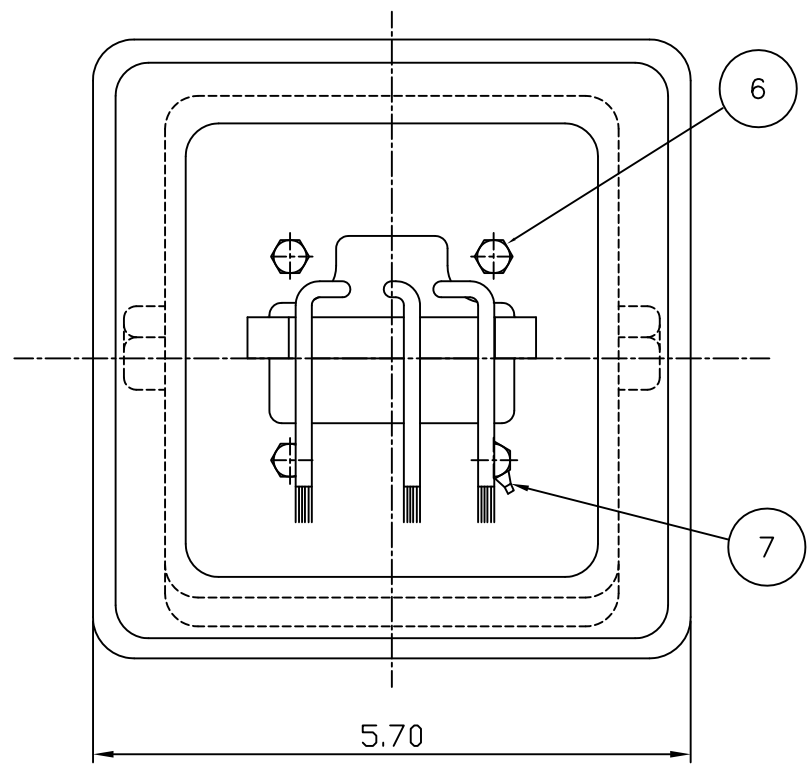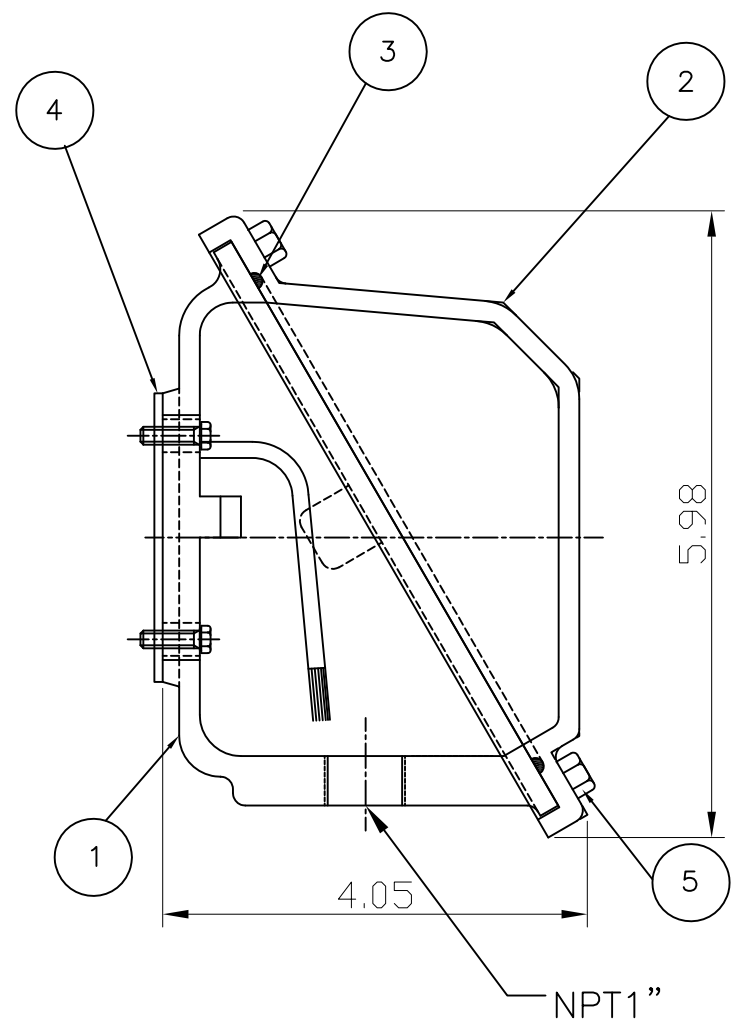

PT	DESCRIPTION	MATERIAL	DIMENSION	Q'TY
1	CONDUIT BOX	FC15	---	1
2	CONDUIT BOX COVER	FC15	---	1
3	O-RING / COVER	EPDM	ø4	1
4	BOX GASKET	NBR	---	1
5	COVER+BOX HEX BOLT	S45C	M6 X L20	4
6	BOX+FRAME HEX BOLT	S45C	M6 X L20	4
7	GROUND TERMINAL LUG	CU	---	1

Q'TY	DESCRIPTION	MATERIAL	DIMENSION	WEIGHT	PART NO.	REMARK	NO.
APPD BY		UNIT	INCH	SUBJECT	NEMA 213/215	CAD PROJ \ FILE	
CHKD BY		SCALE	1:1	227B8008CB2			
CHKD BY	---	PROJEC'N	(3rd Angle)	TITLE			
DSND BY	JEONG JIN SEON	DATE	2007.04.28.	TERMINAL BOX ASSEMBLY			
REF. NO		227B8004NA2		Sheet No.		of	
DWG NO		227B8004NA2		Revision No.		0	



REV	DATE	CONTENTS	REVD BY	CHKD BY	CHKD BY	APPD BY