



WORLDWIDE ELECTRIC MOTOR DATA SHEET

PEWWE2-36-145TC



HORSEPOWER	2		
RPM / POLES	3600 / 2		
VOLTAGE / PHASE	230 / 460 V / 3		
FRAME	145TC		
ENCLOSURE / DEGREE OF PROTECTION	TEFC / IP55		
FREQUENCY	60 HZ Suitable For 50 HZ Operation With 1.0 SF		
FULL LOAD SPEED	3495 RPM		
SERVICE FACTOR	1.25		
INSULATION CLASS	F		
FULL LOAD AMPS; 230 / 460	5.48 / 2.74 A (Usable On 208V At 6.05 A)		
LOCKED ROTOR AMPS (STARTING); 230 / 460	50 / 25 A		
NO LOAD CURRENT	3.2 / 1.6 A		
NEMA CODE LETTER	L		
EFFICIENCY / POWER FACTOR	<u>LOAD</u>	<u>EFF.</u>	<u>P.F.</u>
	100 %	85.5%	0.80
	75 %	85.0%	0.71
	50 %	82.5%	0.58
DUTY CYCLE	S1 / Continuous		
TORQUE	<u>FULL LOAD</u>	<u>LRT</u>	<u>BDT</u>
	3.01 lb.ft.	230%	340%
SLIP	2.92 %		
NEMA DESIGN	B		
MOMENT OF INERTIA	0.0483 lb.ft. ²		
MAX. TIME LOCKED ROTOR (Hot)	12 Seconds		
SOUND PRESSURE LEVEL	63 dB (A)		
MAX. AMBIENT TEMPERATURE	40° C		
MAX. ELEVATION	3300 Ft.		
TEMPERATURE RISE (At Full Load)	80° C		
DE BEARING	6205ZZ C3		
ODE BEARING	6205ZZ C3		
REGREASING INT. - DE BEARING	---		
REGREASING INT. - ODE BEARING	---		
GREASE TYPE	SKF LGHP 2		
MOUNTING	F1 (F2 Suitable)		
ROTATION	Bi-Directional		
SHAFT MATERIAL	1045 Carbon Steel		
INVERTER RATING	10:1 CT / 20:1 VT PWM Type		
CONNECTION DIAGRAM	230 / 460 V - 9 Lead Y		
AREA CLASSIFICATION	Class I, Division 2, Groups A, B, C, D		
APPROXIMATE WEIGHT	50.7 lbs.		




CC006A





WORLDWIDE ELECTRIC MOTOR DRAWING

PEWWE-145TC

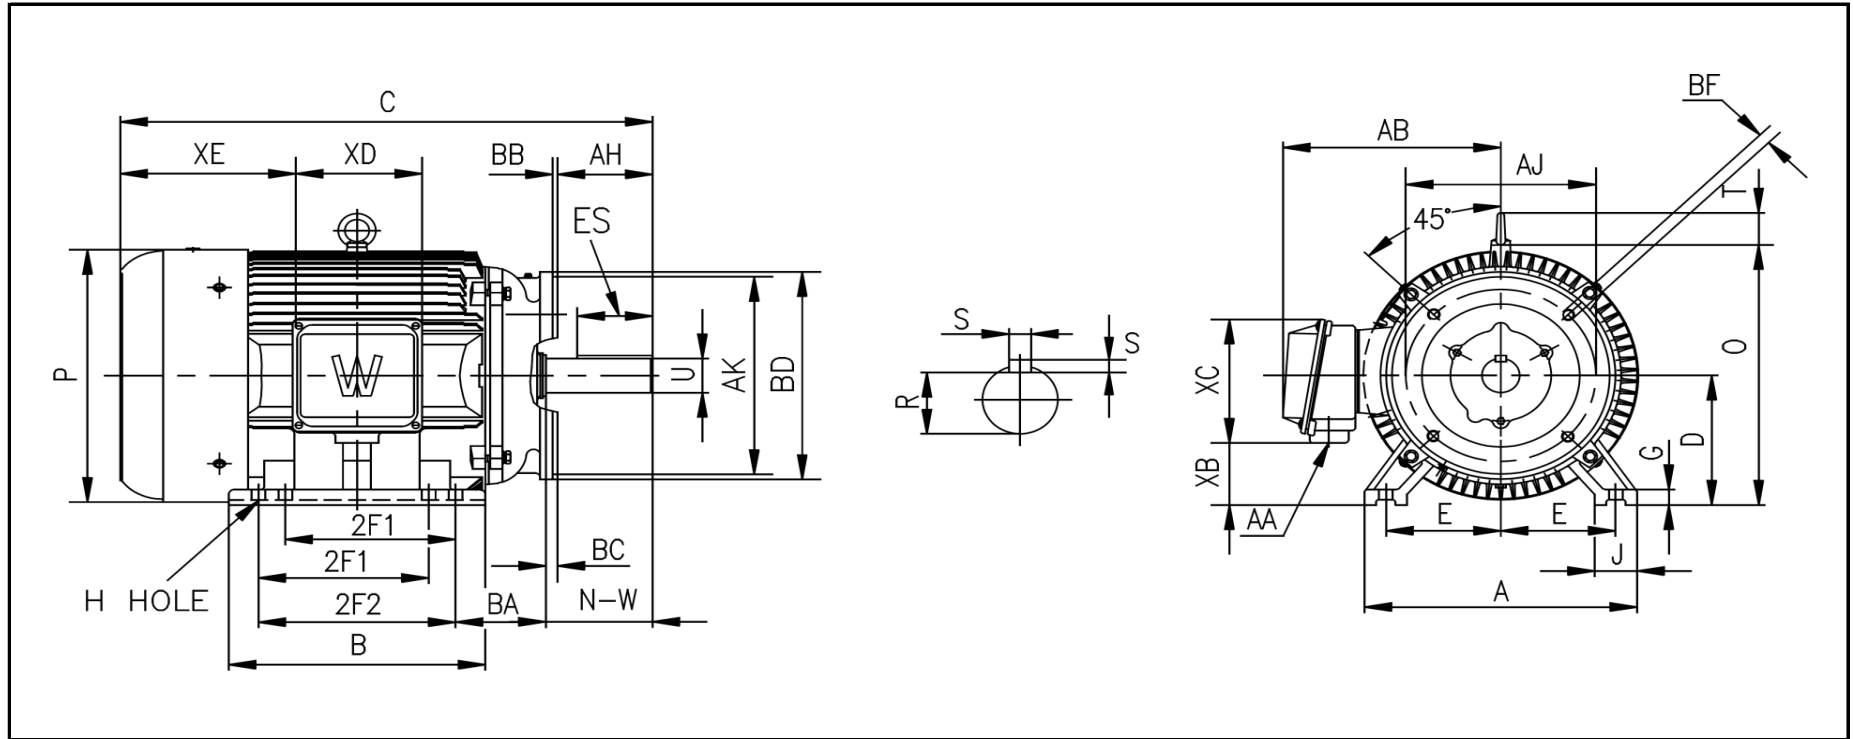

DIMENSIONS - INCHES

MOUNTING					A	B	C	D	G	J	P	O	T	AB
E	2F1	2F2	H	BA										
2.75	4	5	0.34	2.25	7	6.6	13.5	3.5	0.43	1.2	8	7.8	1.42	6.7

KEY		KEYSET	FLANGE				SHAFT		TERMINAL BOX					
S	ES	R	AK	AJ	BF	BB	BD	N-W	U	AA	XB	XC	XD	XE
0.188	1.42	0.771	4.5	5.875	3/8 - 16	0.16	6.5	2.25	0.875	0.75	1.6	4.6	4.1	4.45

REVISED - 08/11/17

PERFORMANCE CURVES

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net





Premium Efficiency Motor:

PEWWE2-36-145TC

Document Generated:	25-Jun-2020	Customer:	
Document ID:			

Motor Type	PEWWE				
Output Rating (HP)	2	FL Speed	3490		
Full Load Torque	3.01 lb.ft	LRT (%FLT)	230	460 volt FLA	2.74
Rotor Wk ²	0.05 lb-ft ²	BDT (%FLT)	320	230 volt FLA	5.48A

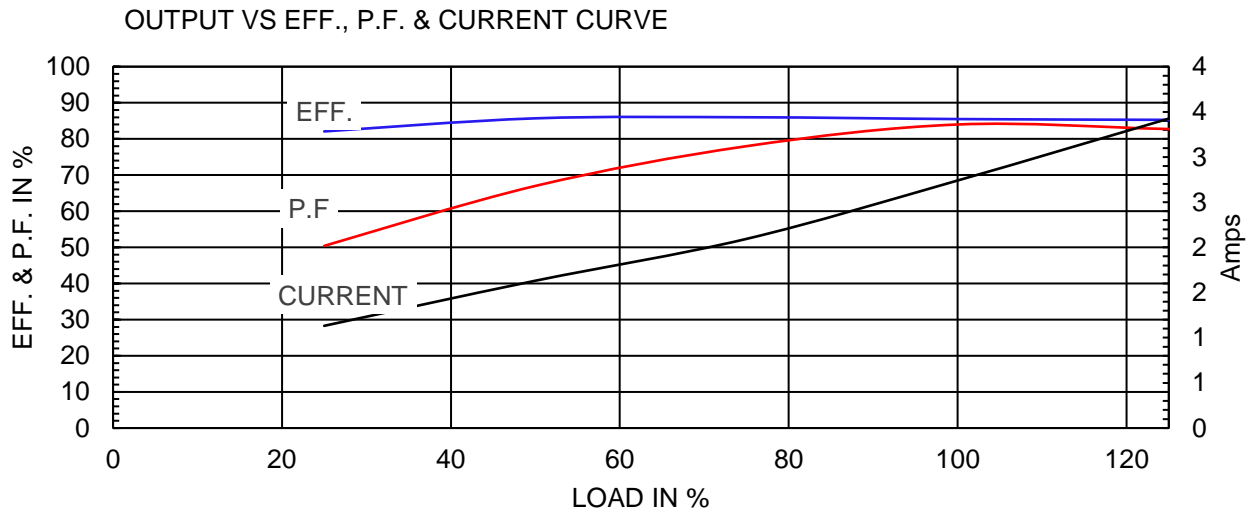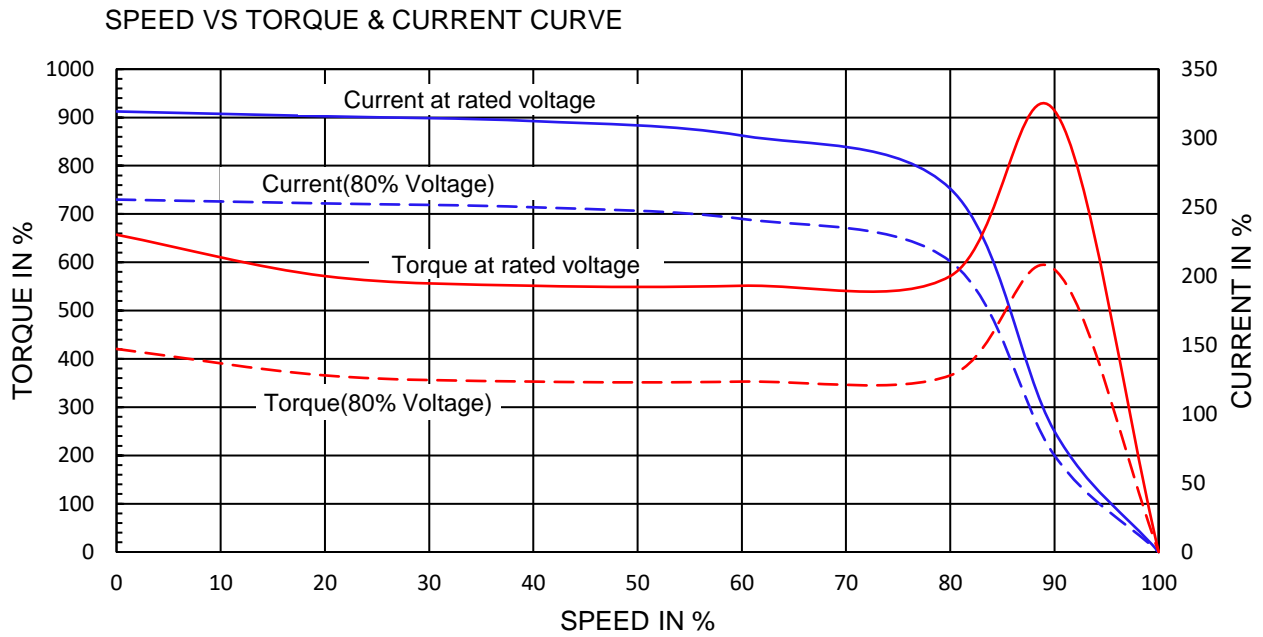

NAMEPLATE / WIRING

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net






Premium Efficiency Motor: **PEWWE2-36-145TC**

Document Generated: 24-Sep-2019
Document ID:

Customer:

SAMPLE NAMEPLATE DATA

 		PREMIUM EFFICIENCY 3-PHASE INDUCTION MOTOR				CC006A ISO9001	259277 		
Model	PEWWE2-36-145TC		Ser No.	ZP			Low Voltage 4-5-6 7-8-9 1-2-3 L1 L2 L3 <hr/> High Voltage 4-5-6 7-8-9 1-2-3 L1 L2 L3		
HP	2	S.F.	1.25	Type		Encl		TEFC IP55	
Frame	145TC	P.F.	0.84	Ins Cl	F	Rating		40°C Amb Cont	
Voltage	230/460	Hz	60 Hz	Design	B	DE Brng		6205ZZ C3	
Amps	5.48A / 2.74A	RPM	3490	Code	L	ODE Brng		6205ZZ C3	
Nom.Eff.	FL 85.5 %	3/4	86.0 %	230/460V		Date			
Usable on 208V network at		6	Amps	1.0SF	Class I DIV. 2 Groups A B C D	Amb.40°C		T3C(160°C)	
		10:1 CT	20:1 VT	PWM VFD	1.0SF	Class I Zone 2 IIC		Amb.55°C	T3A(180°C)
50Hz		2	HP	200/400 V	V 6.6 / 3.3	A		2880 rpm	S.F1.0
WorldWide Electric Corporation									

