

DATA SHEET

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Premium Efficiency Motor: **SSPE15-18-254TCRD,**

60 Hz

Document Generated: 9-Nov-2020

Document ID:

Customer:

MOTOR INFORMATION

HP	15
RPM	1800
Phase	3
Frequency	60
Voltage	230/460
Frame Size	254TC
Enclosure	TEFC
Degree of Protection	IP66
Service Factor	1.15
Poles	4
Full Load Speed	1765
Insulation Class	F
Temp Rise	80°C
NEMA Code Letter	G
Duty Cycle	S1
Slip	1.94%
NEMA Design	B
Moment of Inertia	1.8 lb.ft.^2
Locked Rotor Time (Hot)	12 seconds
Sound Pressure Level	69 dB(A)
Number of Starts	12
Max Ambient Temperature	40° C
Max Elevation	1000 m.a.s.l (3300 f.a.s.l)
Mounting	F1
Rotation	Bidirectional
Area of Classification	Div.2 Class I, Gr. A,B,C&D T2B
Inverter Rating	10:1 CT/20:1 VT
Standard	NEMA MG1, UL1004
Approvals	CSA,UL,CE

EFFICIENCY/POWER FACTOR

LOAD	EFF	P. F.
100%	92.4 %	0.85
75%	92.0 %	0.75
50%	91.5 %	0.62

TORQUE

FULL LOAD	LRT	BDT
44 lb.ft.	200 %	260 %

AMPERAGE INFORMATION

	230V	460V
Full Load Amps	37A	18.5
Locked Rotor Amps	232A	116A
No Load Current	16A	8A
Usable at 208V		40 A

BEARING INFORMATION

DE Bearing	6309 2RS
ODE Bearing	6309 2RS
Grease Type	Mobil Polyrex EM
DE Regreasing Interval	-- Hours
ODE Regreasing Interval	-- Hours
Grease Quantity	--

ADDITIONAL DATA

F2 Suitable	No
Shaft Material	304 Stainless Steel
Connection Diagram	12 Lead 2Δ/Δ
Approximate Weight	368 lbs.

REVISED 10/21/2020


MOTOR DRAWING

Premium Efficiency Motor: **SSPE15-18-254TRD**

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net

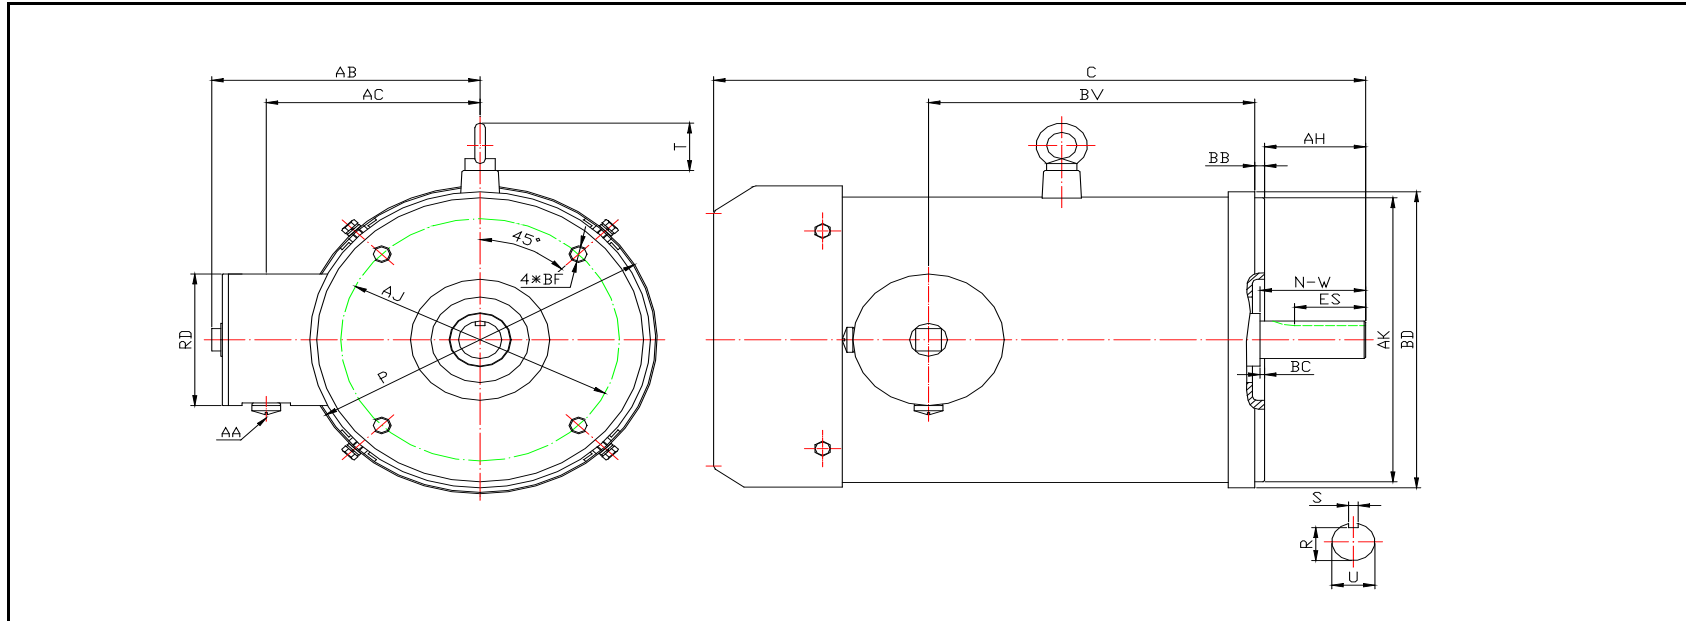

DIMENSION - INCHES

MOUNTING						A	B	C	D	G	P	O	T
E	2E	2F1	2F2	H	BA								
N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	23.2	N/A	N/A	12.7	N/A	2.1

AB	BC	KEY		KEYSET	SHAFT			TERMINAL BOX				
		S	ES	R	AH	N-W	U	AA	AB	AC	RD	BV
8.9	0.25	0.375	2.91	1.416	3.75	4	1.625	3/4	8.9	7.25	5.12	12.65

FLANGE				
AJ	AK	BB	BD	BF
7.25	8.5	0.25	11.72	4*1/2-13

REV.	SUMMARY OF MODIFICATIONS	DATE
0		10/21/2020

PERFORMANCE CURVES

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Premium Efficiency Motor:

SSPE15-18-254TCRD

Document Generated: 9-Nov-2020
Document ID:

Customer:

Motor Type	SSPE		FL Speed	1765	
Output Rating (HP)	15		LRT (%FLT)	200	
Full Load Torque	44	lb.ft	460 volt FLA	18.5	
Rotor Wk^2	1.8	lb-ft^2	230 volt FLA	37A	
			BDT (%FLT)	260	

